


REMOVE ORIGINAL FLANGE FROM ROUTER AND  
REPLACE WITH A PIECE OF PLEXIGLASS TO FIT INTO  
TABLE TOP

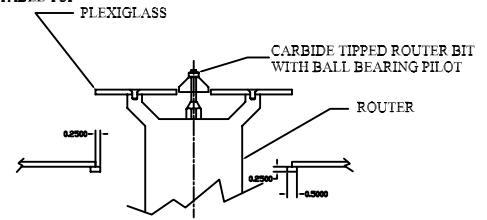

FLANGE IS EITHER GLUED OR SCREWED TO TABLE  
TO POSITION ROUTER SO IT MAY DROP INTO TABLE

SECTION A-A



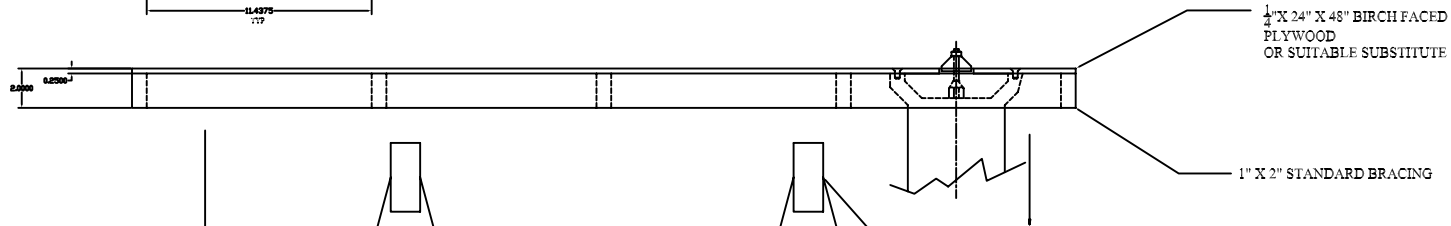


TABLE TOP MUST BE SECURED TO WALL TO PREVENT IT FROM  
TIPPING BACKWARDS OR FORWARDS

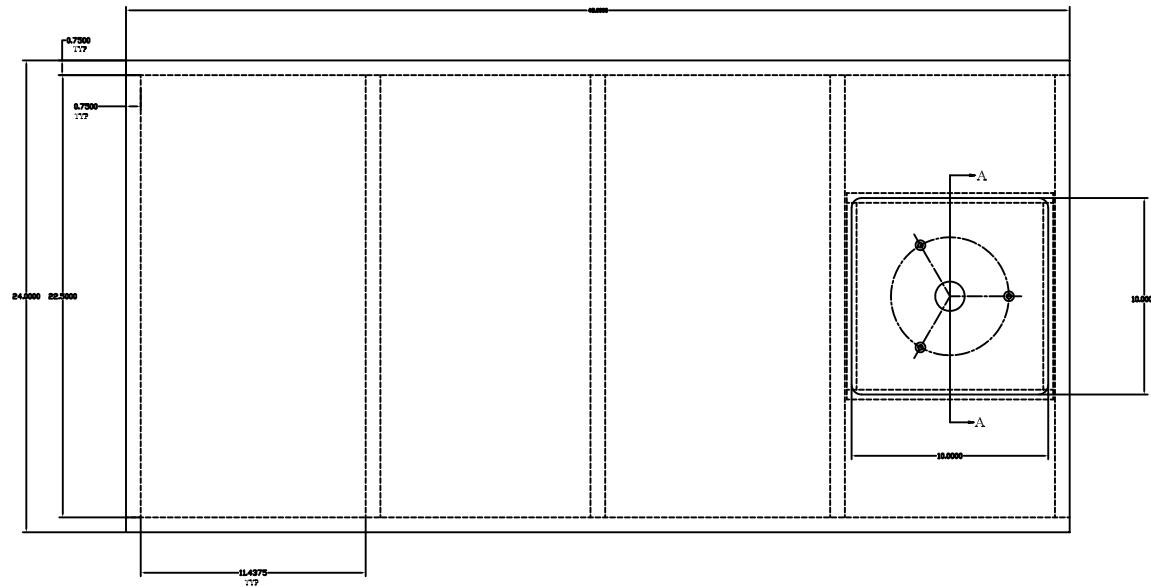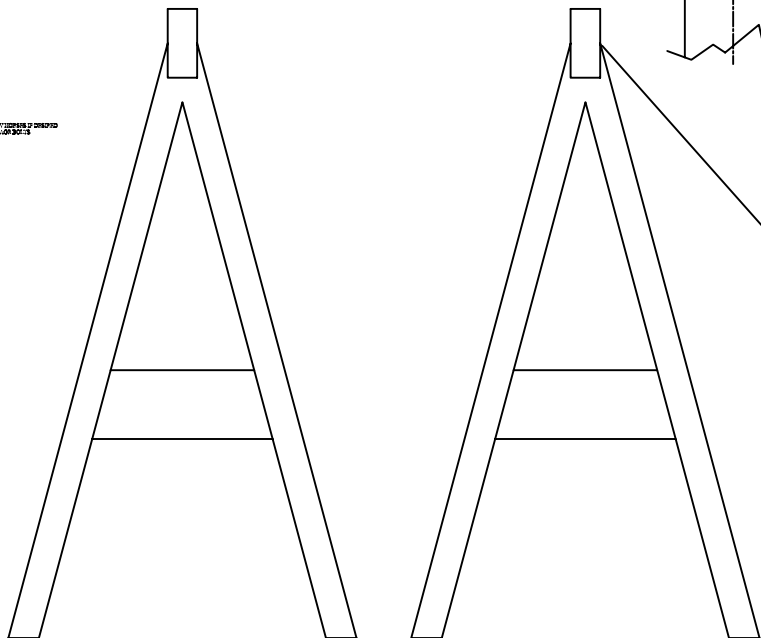

STANDARD SAW  
HORSE BRACKETS  
2" X 4" STANDARD  
LUMBER